

Product:6-18Ghz 16 Way power divider

Part Number: LPD-6/18-16S



Specification					
No.	Parameter	Minimum	Typical	Maximum	Units
1	Frequency range	6	-	18	GHz
2	Insertion Loss		-	3.0	dB
3	Phase Balance:		-	± 6	dB
4	Amplitude Balance		-	± 0.4	dB
5	Isolation	18			dB
6	VSWR (in)		-	1.6	-
7	VSWR (out)			1.5	
8	Power			10	W cw
9	Operating Temperature Range	-40	-	+85	°C
10	Impedance	-	50	-	Ω
11	Connecter	SMA			
12	Preferred finish	Black/Sliver/yellow/blue			

Remarks:

1. Not include Theoretical loss 12db
2. Power rating is for load vswr better than 1.20:1

Environmental Specifications	
Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+105°C
Vibration	25gRMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions
Mechanical Specifications	
Housing	Aluminum
Connector	Passivated or stainless steel
Female Contact:	gold plated beryllium brass
Rohs	compliant
Weight	0.4kg

Outline Drawing:


成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd
 电话: 028-65199117 传真: 028-65199116
<http://www.leadermicrowave.com> sales@leader-mw.com
 TEL: +86-28-65199117 FAX: +86-28-65199116
 Add: 中国 成都市成华区华翰路 89 号 610000
 No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

All Dimensions in mm

Outline Tolerances $\pm 0.5(0.02)$

Mounting Holes Tolerances $\pm 0.2(0.008)$

All Connectors: SMA-Female

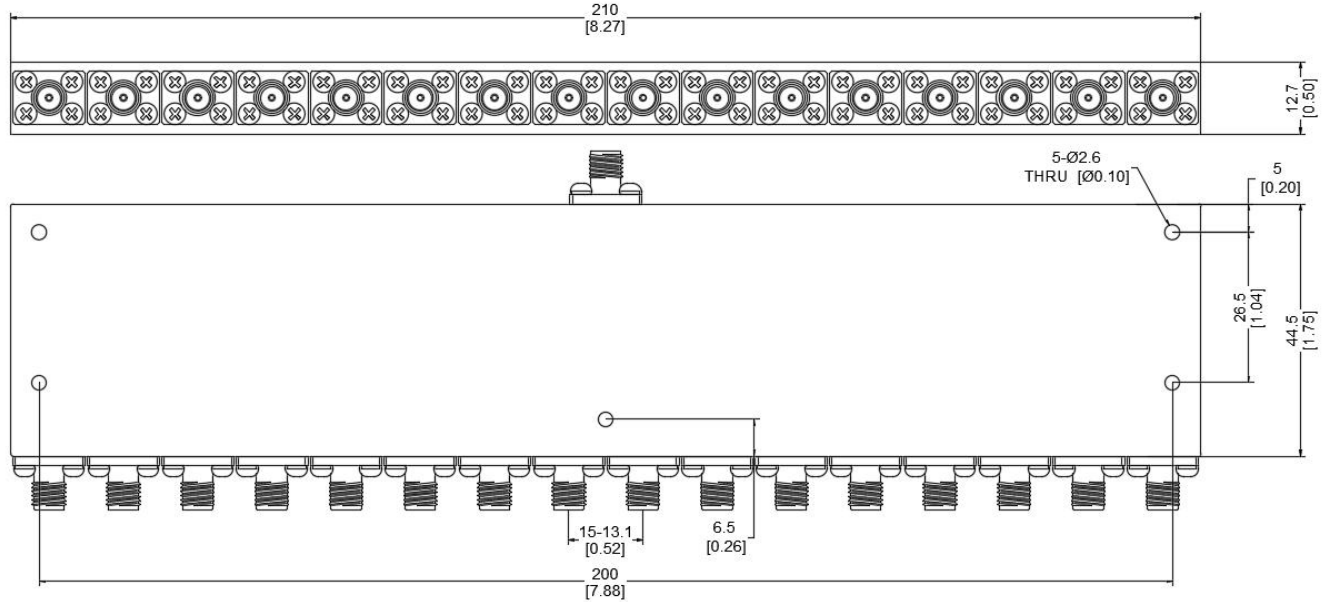

TEST DATA

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd


电话: 028-65199117 传真: 028-65199116

<http://www.leadermicrowave.com> sales@leader-mw.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

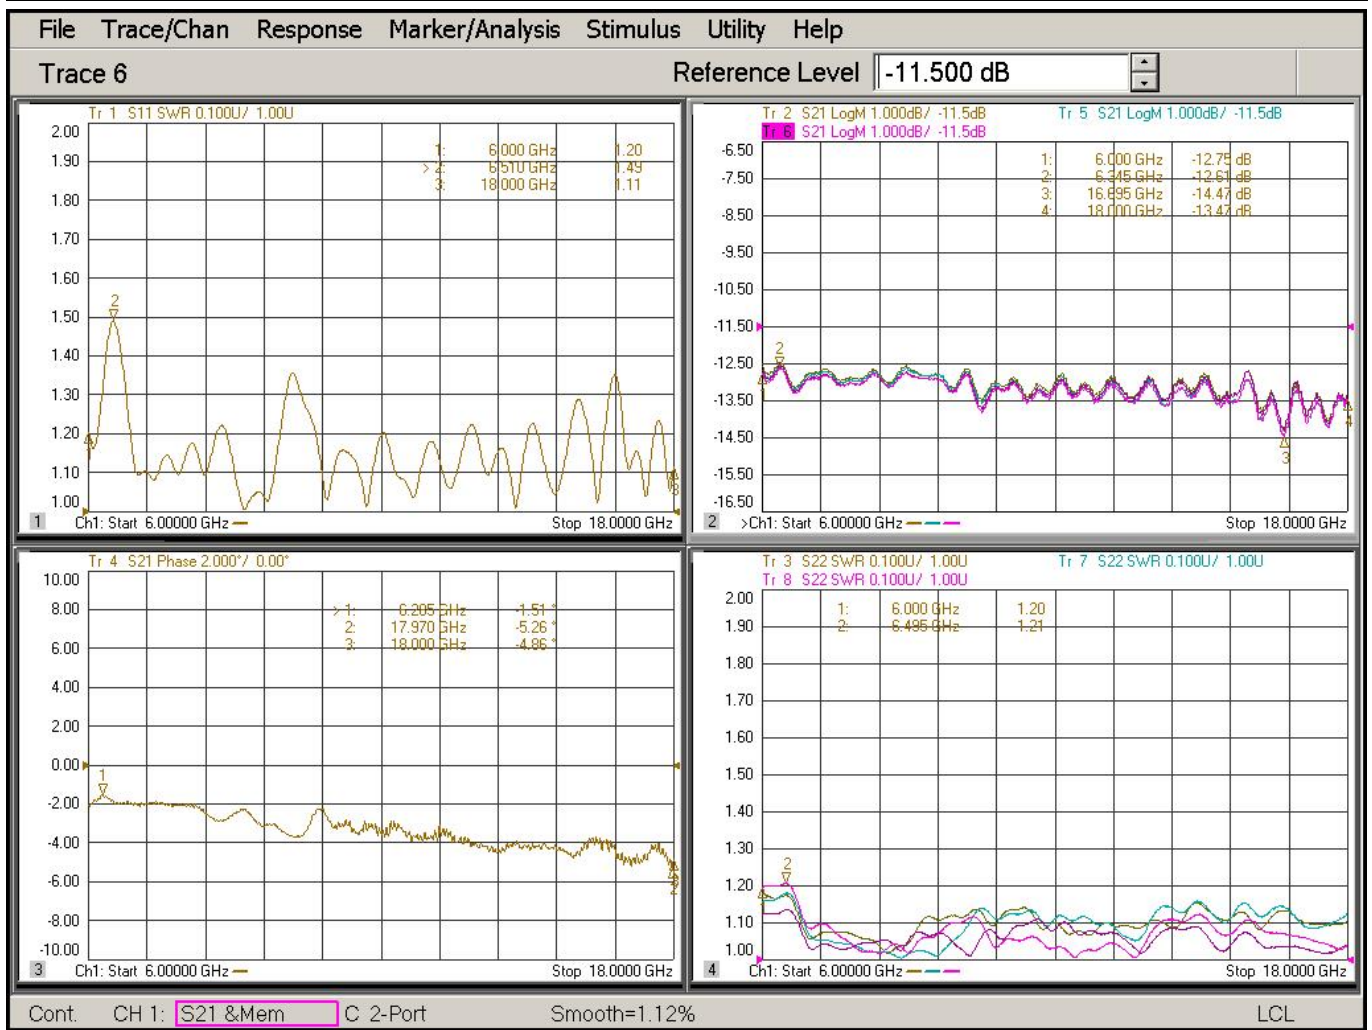

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leadermicrowave.com> sales@leader-mw.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

