

LPD-1/40-2S

Power Divider

Specifications

● Frequency Range:	1000~40000MHz
● Insertion Loss:	≤2.4dB
● Amplitude Balance:	≤±0.4dB
● Phase Balance:	≤±5 deg
● VSWR:	≤1.50 : 1
● Isolation:	≥18dB
● Impedance:	50 OHMS
● Port Connectors:	2.92-Female
● Power Handling:	20 Watt
● Operating Temperature:	-32°Cto+85°C
● Surface Color:	Black

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd


电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add:中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

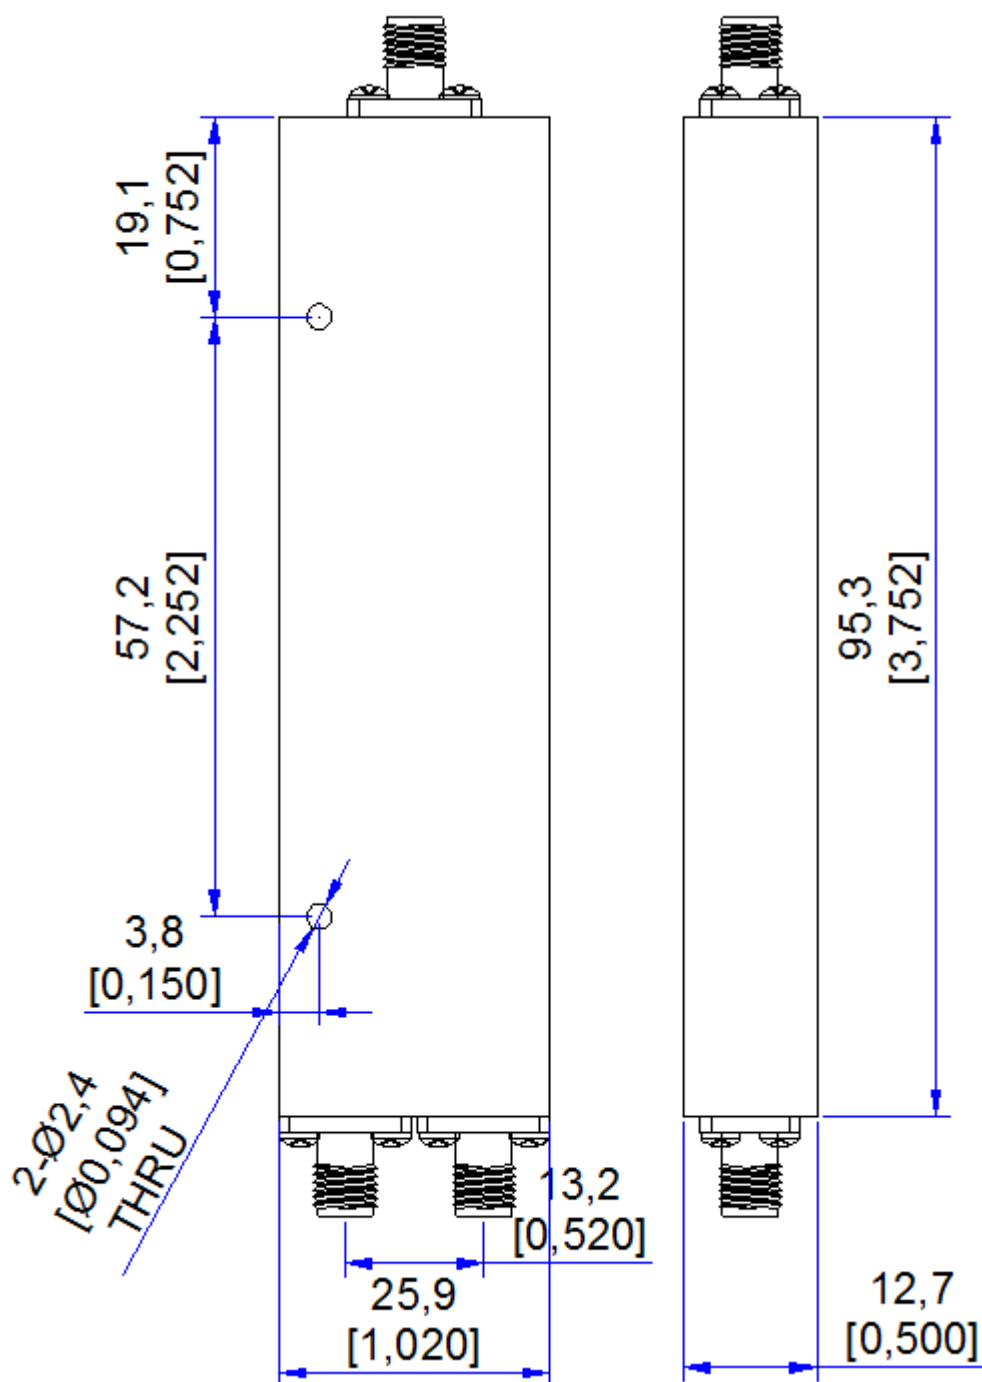

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000



ISO9001:2008 质量认证
ISO14001:2004 环境认证

技术文件 Technical Specifications Rev:A0

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000