

P Product: BNC Female to BNC Female Adapter.

Part Number: BNC-BNC

| Specification |                             |         |            |         |       |
|---------------|-----------------------------|---------|------------|---------|-------|
| No.           | Parameter                   | Minimum | Typical    | Maximum | Units |
| 1             | Frequency range             | DC      | -          | 4       | GHz   |
| 2             | Insertion Loss              | -       | -          |         | dB    |
| 6             | VSWR                        | -       | -          | 1.15    | -     |
| 8             | Operating Temperature Range | -40     | -          | +85     | °C    |
| 9             | Impedance                   | -       | 50         | -       | Ω     |
| 10            | Connector                   |         | BNC-Female |         |       |

| Environmental Specifications |                             |
|------------------------------|-----------------------------|
| Operational Temperature      | -40°C~+85°C                 |
| Storage Temperature          | -50°C~+105°C                |
| Mechanical Specifications    |                             |
| Housing                      | Brass Nickel plated         |
| Female Contact:              | gold plated beryllium brass |
| Rohs                         | compliant                   |
| Insulator                    | Teflon                      |
| Weight                       | 80g                         |

### Outline Drawing:

All Dimensions in mm

Outline Tolerances  $\pm 0.5(0.02)$

Mounting Holes Tolerances  $\pm 0.2(0.008)$

All Connectors: BNC-female

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116


<http://www.leadermicrowave.com> [sales@leader-mw.com](mailto:sales@leader-mw.com)

TEL: +86-28-65199117 FAX: +86-28-65199116


Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

## BNC-KK

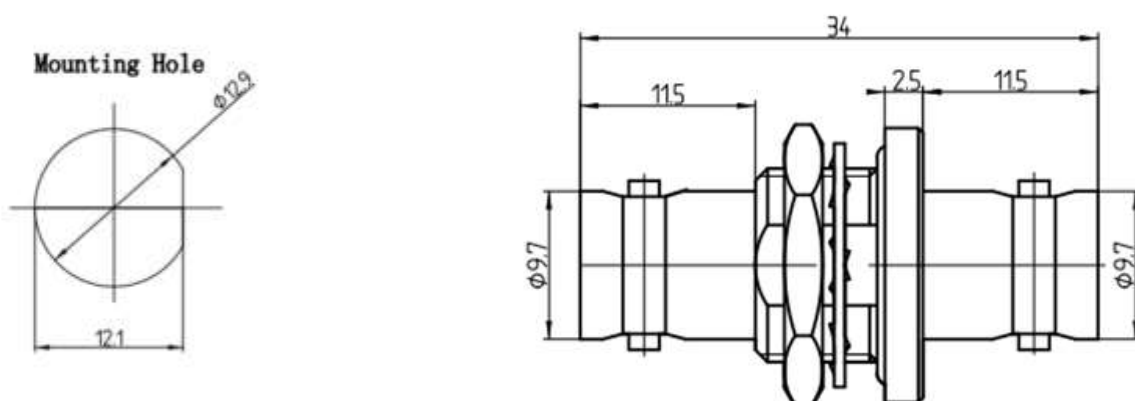

## BNC-KKF

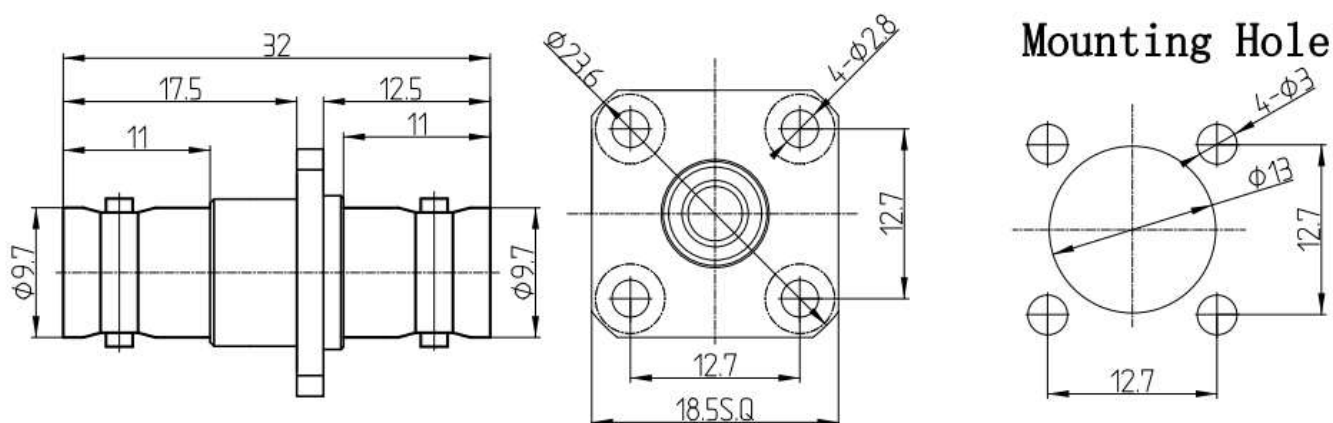

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116


<http://www.leadermicrowave.com> [sales@leader-mw.com](mailto:sales@leader-mw.com)

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

Test data

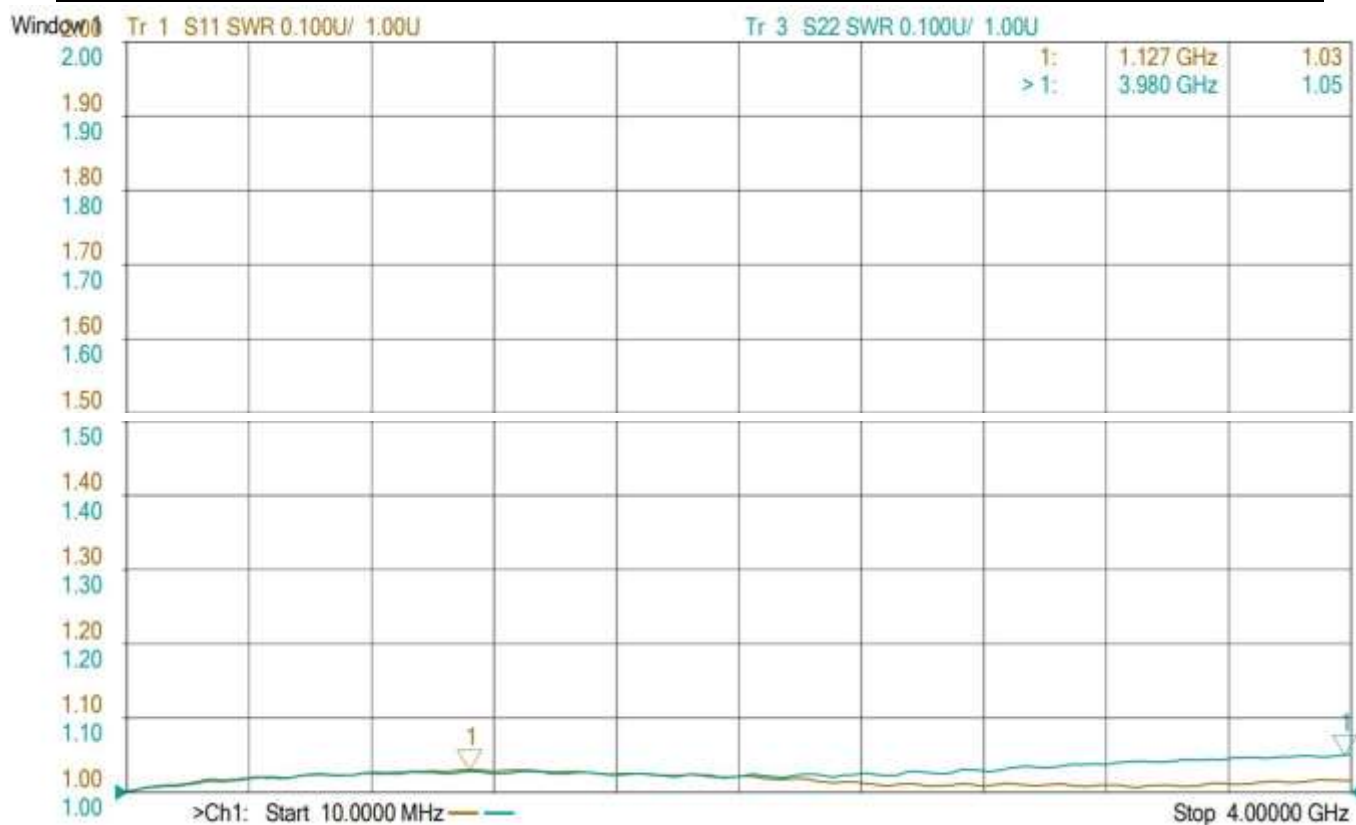

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leadermicrowave.com> [sales@leader-mw.com](mailto:sales@leader-mw.com)

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000